How to change fuel filter on **AUDI Allroad C5 (4BH)** – replacement guide

SIMILAR VIDEO TUTORIAL



This video shows the replacement procedure of a similar car part on another vehicle

Important!

This replacement procedure can be used for:
AUDI Allroad C5 (4BH) 2.7 T quattro, AUDI Allroad C5 (4BH) 4.2 V8 quattro

---

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: AUDI 80 B4 Saloon (8C2) 2.0

REPLACEMENT: FUEL FILTER – AUDI ALLROAD C5 (4BH). TOOLS YOU NEED:



- Wire brush
- WD-40 spray
- Torque wrench
- Combination spanner #17
- Combination spanner #19
- Combination spanner #22
- Drive socket # 10
- Ratchet wrench
- Fluid container

Buy tools


Replacement: fuel filter – AUDI Allroad C5 (4BH). AUTODOC experts recommend:

- Ensure adequate ventilation of the workplace. Fuel vapors are poisonous.
- All work should be done with the engine stopped.

REPLACEMENT: FUEL FILTER – AUDI ALLROAD C5 (4BH). TAKE THE FOLLOWING STEPS:


1. Lift the car using a jack or place it over an inspection pit.

2. Unscrew the fastener attaching the fuel supply line to the fuel filter housing. Use a combination spanner #19. Use a combination spanner #22.

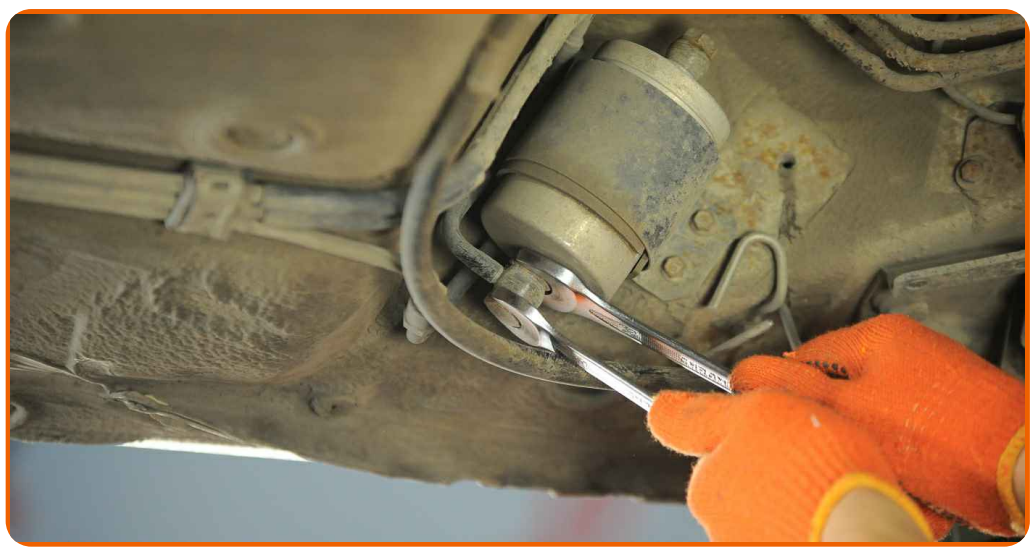

3. Prepare a container for fluids.

4. Disconnect the pipe from the fuel filter.

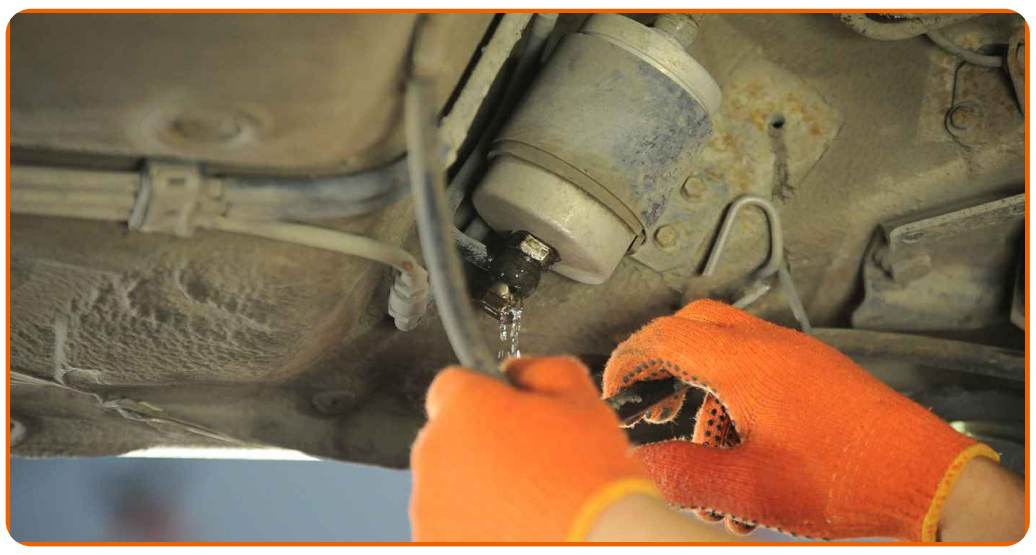


Replacement: fuel filter – AUDI Allroad C5 (4BH). Tip:

- Be careful! Fuel may leak from the filter housing and hoses.

5 Unscrew the fastener attaching the fuel supply line to the fuel filter housing. Use a combination spanner #17. Use a combination spanner #22.




6 Disconnect the pipe from the fuel filter.

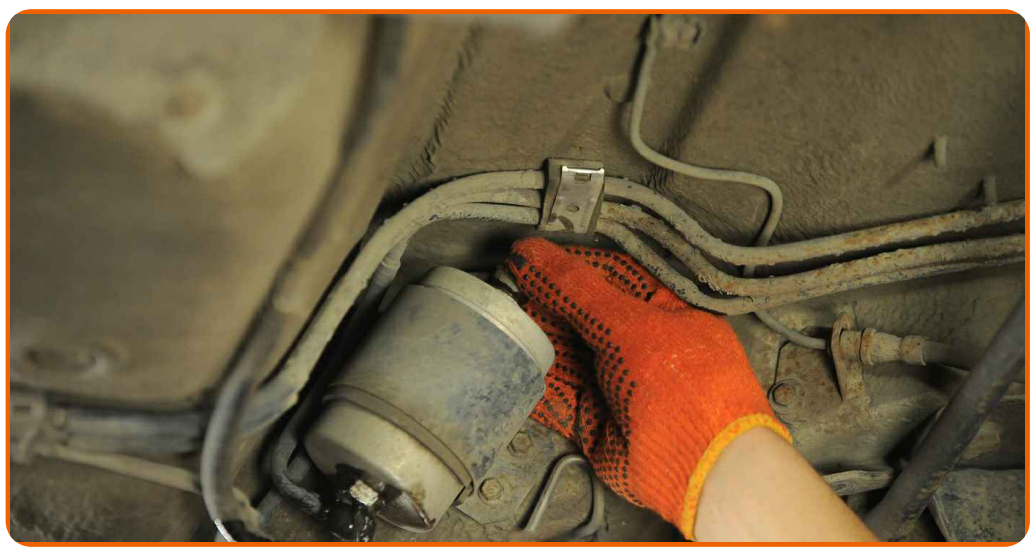

7 Clean the fuel filter bracket. Use a wire brush. Use WD-40 spray.

8 Unscrew the fuel filter bracket fixing bolts. Use a drive socket #10. Use a ratchet wrench.

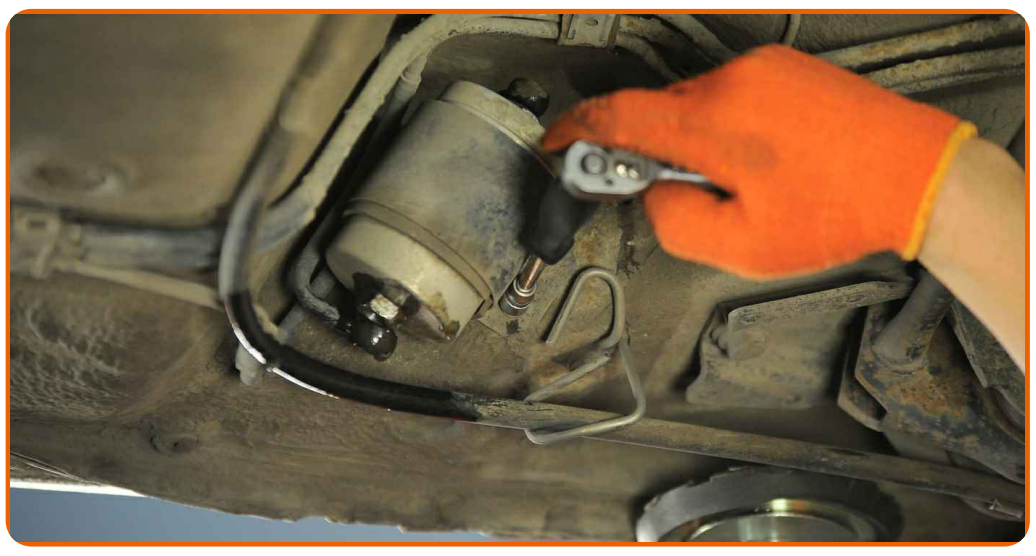


9 Remove the fuel filter together with its bracket.

10 Remove the fuel filter.




11 Install a new fuel filter.

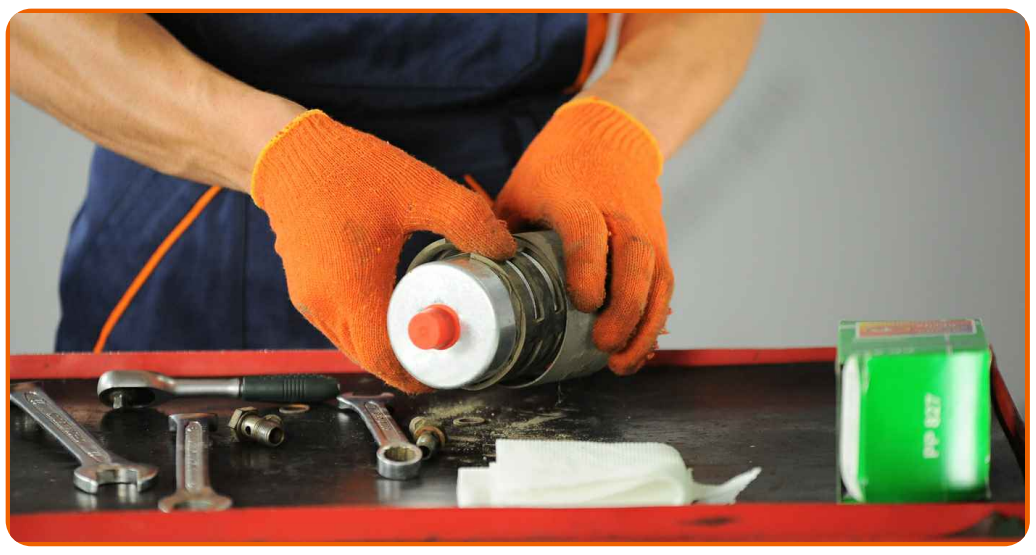

AUTODOC recommends:

- Make sure that the fuel filter is positioned correctly. Consider the fuel flow direction mark.
- During installation, take care to prevent dust and dirt from getting into the fuel filter housing.
- AUDI Allroad C5 (4BH) – It's important to only use high-quality filters.

12 Install the new fuel filter together with its bracket.

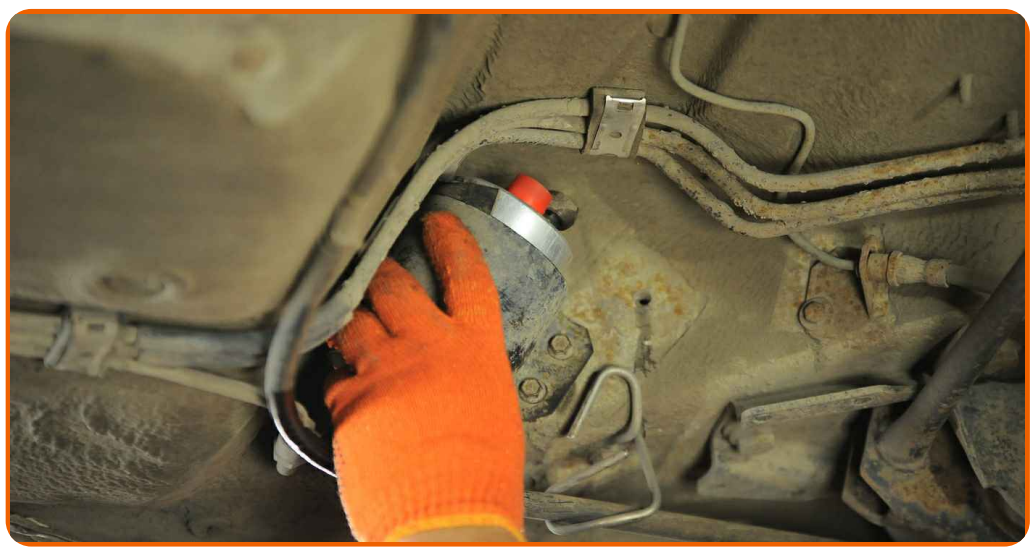

13 Screw the fixing bolts of the fuel filter bracket. Use a drive socket #10. Use a ratchet wrench.



14 Attach the pipe to the fuel filter.




15 Screw the fastener attaching the fuel supply line to the fuel filter housing. Use a combination spanner #17. Use a combination spanner #22.



16 Attach the pipe to the fuel filter.



17 Screw the fastener attaching the fuel supply line to the fuel filter housing. Use a combination spanner #19. Use a combination spanner #22.

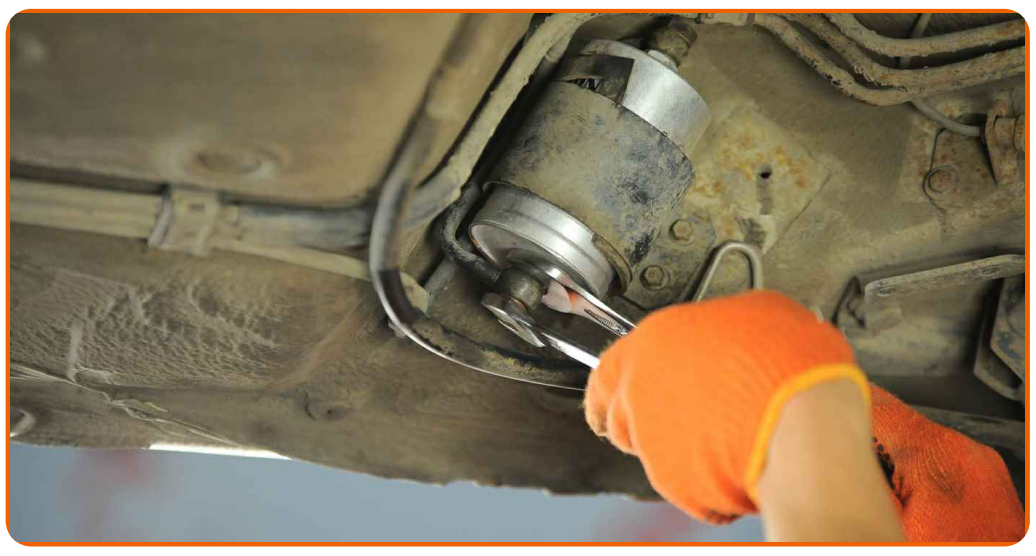

18 Take the fluid container away from under the fuel filter.

19 Lower the car.

Replacement: fuel filter – AUDI Allroad C5 (4BH). Tip from AUTODOC:

- Before starting off, switch the ignition on and off several times. This should be done to activate the fuel pump to make it pump fuel through the fuel system.

20 Run the engine for a few minutes. This is necessary in order to make sure that the component operates properly.

21 Shut off the engine.

AUTODOC recommends:

- To protect the environment from pollution, be sure to dispose of the used filters at special collection points.

WELL DONE!

VIEW MORE TUTORIALS

AUTODOC — TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

ⓘ DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.